


Standard duty key operated chucks nickel plated.

Model No.	Drilling capacity mm	Mount	Through hole diameter mm	With key	A mm	B mm	C mm	Packaging style	Weight g
AH06F38RNP	0-6	Female thr. 3/8" x 24	5.5	KH810	30	40	50.5	Individual box	107
AH10F38RNP	1.5-10	Female thr. 3/8" x 24	5.5		33	40	58.6		120
AH10F12RNP		Female thr. 1/2" x 20	6.5						

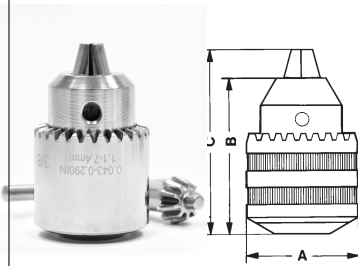

Stainless steel key operated chucks for use specifically in medical, chemical and food sector.

Model No.	Drilling capacity mm	Mount	With key	A mm	B mm	C mm	Packaging style	Weight g
SSA04J0	0.3-4mm	JT0	SS-K0	22	28	35	Individual box	66
SSA06J1	0.3-6.5mm	JT1	SS-S1	28.5	40.5	49		165
SSA06F38		3/8-24UNF						170
SSA10J2	0.3-10mm	JT2S	SS-S2	39	51	63		295
SSA10F38		3/8-24UNF						

new



Ball-bearing drill chuck with key - for production drilling equipment.

Drill chuck with key for industrial applications that require the toughest machining conditions. Equipped with ball bearings to reduce frictions in the tightening mechanism and provide a better grip on the drill shaft.

All the pieces are hardened and ground.

Range up to 25 mm capacity

Porta code	Jacobs equivalent	Capacity mm	Mount	Key type
APBB10J2	11N	1-10	JT2	K2
APBB13J3	14N	1-13	JT3	K3
APBB16J3	16N	1-16	JT3	K4
APBB20J4	18N	1,5-20	JT4	K4
APBB25J5	20N	5-25	JT5	K5